



SKYTECH
PRODUCTS GROUP



**Controls,
valves & accessories
from the leader in
the hearth industry.**

2016

A powerful blend of experience, imagination and technical horsepower make Skytech the recognized leader in the remote systems industry. For more than 20 years, we have lead the way with bold innovation, bullet-proof reliability and real-time support. When the fireplace and hearth industry need something done right, they count on Skytech to

make it happen.





Skytech remotes and accessories...



« 5001

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- Touchscreen transmitter
- ON/OFF control
- Backlit LCD screen
- Flame icon indicator
- Low battery indicator
- Child safety lock out
- Wall mount docking station

« 5010

- Battery operated transmitter - RF
- 110VAC plug-in receiver
- 1,048,576 security codes
- Touchscreen transmitter
- ON/OFF control
- Backlit LCD screen
- Flame icon indicator
- Low battery indicator
- Child safety lock out
- Wall mount docking station

Skytouch Series



« 5301

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- Touchscreen transmitter
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- 9-hour countdown timer
- Child safety lock out
- Wall mount docking station

« 5310

- Battery operated transmitter - RF
- 110VAC plug-in receiver
- 1,048,576 security codes
- Touchscreen transmitter
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- 9-hour countdown timer
- Child safety lock out
- Wall mount docking station

5301P »

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- Touchscreen transmitter
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- Programmable (Weekday/Weekend) (5/2)
- Wall mount docking station

5310P »

- Battery operated transmitter - RF
- 110VAC plug-in receiver
- 1,048,576 security codes
- Touchscreen transmitter
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- Programmable (Weekday/Weekend) (5/2)
- Wall mount docking station





« 1001-A

All battery operated transmitter & receiver - RF
 ON/OFF transmitter
 65,536 security codes
 All batteries and wall clip included
 Receiver will learn up to two additional Skytech transmitters



FG-105 ⤴

All battery operated transmitter & receiver - RF
 255 security codes



1001T-LCD-A ⤴

All battery operated transmitter & receiver - RF
 ON/OFF transmitter
 LCD display room temperature in °F or °C,
 3-hour countdown timer
 Flame icon indicator
 Low battery indicator
 1,048,576 security codes
 Receiver will learn up to two additional Skytech transmitters



CON ⤴

All Battery operated transmitter & receiver - RF
 ON/OFF transmitter
 Single function control for operating latching solenoid gas valve systems
 65,536 security codes

On/Off Battery Units



TS-R-2A »

All Battery operated transmitter & receiver - RF

Wireless thermostat or manual ON/SET/OFF operation

Large LCD screen displays room and set temperature in °F or °C

1,048,576 security codes

Flame icon indicator

Low battery indicator



1001D-A »

All battery operated transmitter & receiver - RF

Wireless wall switch, surface mount

65,536 security codes

Receiver will learn up to two additional Skytech transmitters




« TM-R-2A

All battery operated transmitter & receiver - RF

65,536 security codes

Receiver will learn up to two additional Skytech ON/OFF transmitters

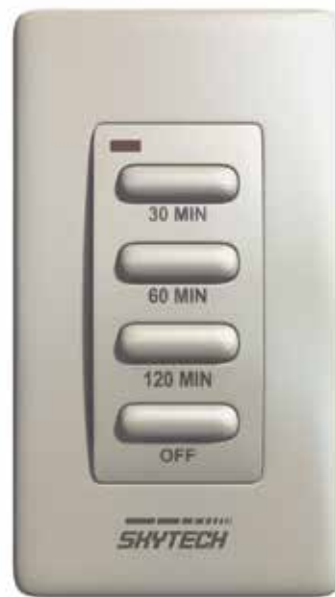

Wireless Wall Units



« 3301P2

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- Programmable (Weekday/Weekend) (5/2)
- Swing temperature (adjustable 1 - 3 degrees)



3301 »

- All Battery operated transmitter & receiver - RF
- 1,048,576 security codes
- LCD displays both room and thermostat set temperature in °F or °C
- Thermostatic control
- 9-hour countdown timer and 24-hour clock
- Flame icon indicator
- Low battery indicator
- Swing temperature (adjustable 1 - 3 degrees)

1001TH-A »

- All battery operated transmitter & receiver - RF
- 4-button ON/OFF/MODE/SET transmitter
- LCD display room and thermostat temperature in °F or °C
- Flame icon indicator
- Low battery indicator
- 1,048,576 security codes
- Receiver will learn up to two additional Skytech transmitters



« CON-TH

- All battery operated transmitter & receiver - RF
- LCD display for room and set temperature in °F or °C
- ON/OFF control
- Flame icon indicator
- Low battery indicator
- Single function control for operating latching solenoid gas valve systems



Thermostatic and Programmable Units



« 3301P

- All battery operated transmitter & receiver - RF
- LCD display room and set temperature in °F or °C
- Programmable thermostat setting, 7 days / 4 periods per day
- 1,048,576 security codes
- 9-hour countdown timer and 24-hour clock
- Flame icon indicator
- Low battery indicator
- Swing temperature (adjustable 1 - 3 degrees)



« 3301PF

- Battery operated transmitter - RF
- 110VAC plug-in receiver
- 1,048,576 security codes
- Programmable thermostat setting, 7 days / 4 periods within one day
- LCD displays both room and set temperature in °F or °C
- Thermostatic control
- 9-hour countdown timer and 24-hour clock
- Flame icon indicator
- Low battery indicator
- Swing temperature (adjustable 1 - 3 degrees)



« 3002

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- LCD displays both room and set temperature in °F or °C
- Thermostatic control
- 9-hour countdown timer
- 24-hour clock
- Flame icon indicator
- Low battery indicator
- Swing temperature (adjustable 1 - 3 degrees)

FGP-305 »

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- LCD displays both room and set temperature in °F or °C
- Thermostatic control
- 9-hour countdown timer
- 24-hour clock
- Flame icon indicator
- Low battery indicator
- Swing temperature (adjustable 1 - 3 degrees)
- Programmable thermostat setting, 7 days / 4 periods within one day



1410TLCD-A »

Battery operated transmitter - RF
110VAC plug-in receiver
ON/OFF transmitter
LCD display room temperature in °F or °C,
3-hour countdown timer
Flame icon indicator
Low battery indicator
1,048,576 security codes
110VAC receiver with learn function, slide switch ON/REMOTE/OFF to manually operate the appliance
Receiver will learn up to two additional Skytech transmitters



« 1410TH-A

Battery operated transmitter - RF
110VAC plug-in receiver
ON/OFF transmitter
LCD display room and thermostat temperature in °F or °C
Flame icon indicator
Low battery indicator
1,048,576 security codes
110VAC receiver with learn function, slide switch ON/REMOTE/OFF to manually operate the appliance
Receiver will learn up to two additional Skytech transmitters



« 1315G-A

Battery operated transmitter - RF
110VAC plug-in receiver
ON/OFF handheld control
255 security codes, 1800 watts
Receiver with 110VAC with 3-prong outlet and inlet

1410-A »

Battery operated transmitter - RF
110VAC plug-in receiver
ON/OFF transmitter
65,536 security codes
110VAC receiver with learn function, slide switch ON/REMOTE/OFF to manually operate the appliance
Receiver will learn up to two additional Skytech transmitters



Remote Controls with 110 Volt Receivers



MRCK ⚡

- All battery operated transmitter & receiver - RF
- Infinite flame adjustment from remote control
- 65,536 security codes
- Single function control for operating the servo motor valve system



MRCK-TH ⚡

- All battery operated transmitter & receiver - RF
- Infinite flame adjustment from remote control
- 65,536 security codes
- LCD display for room and set temperature in °F or °C
- Flame icon indicator
- Low battery indicator
- Single function control for operating the servo motor valve system

Modulating Flame Units



WS ⤴

Decorative rocker-style wall switch and cover plate
UL listed switch
20 foot 18-2 low-voltage wire included



TS-3 ⤴

Wired thermostat or manual ON/SET/OFF operation surface mount
Large LCD screen to display room and set temperature in °F or °C
Flame icon indicator
Low battery indicator



TM-3 ⤴

Battery operated wired transmitter



1310 ⤴

Santa's Helper
Battery operated transmitter - RF
110VAC plug-in receiver
2-button ON/OFF transmitter
255 security codes, 1440 watts
110VAC Receiver with 2-prong outlet and inlet



RS-1A ⤴

Copolymer Tepcon material receiver cover
High temperature material, 230 °F
Improves RF communication



RS-2 ⤴

Log-style receiver cover
Solid refractory construction



1001TX-A ⤴

Battery operated transmitter - RF
ON/OFF transmitter
65,536 security codes
Battery & wall clip included



PRIVATE LABELING ⤴

We offer a private label program to help dealers promote their business and create greater customer awareness. Call us for ordering information.

Accessories



Valve systems...



« **AFVK-SP-MH-L**

- Spark to pilot valve kit measures 3-3/4 inch W x 5-1/2 inch D x 5-1/2 inch H
- ON/OFF/HIGH/LOW remote control included
- Infinite flame adjustment from remote control
- Continuous pilot switch on valve box and remote control
- Quick mount pilot assembly
- Damper clamp included
- Propane conversion kits are available
- All battery operated



AFVK-SP ⤴

- Spark to pilot valve kit measures 3-3/4 inch W x 5-1/2 inch D x 5-1/2 inch H
- Manual flame adjustment
- ON/OFF remote control included
- Continuous pilot switch on valve box and remote control
- Quick mount pilot assembly
- Damper clamp included
- Propane conversion kits are available
- All battery operated



AFVK-SP-H-L ⤴

- Spark to pilot valve kit measures 3-3/4 inch W x 5-1/2 inch D x 5-1/2 inch H
- ON/OFF/HIGH/LOW remote control included
- High or low flame adjustment from remote control
- Continuous pilot switch on valve box and remote control
- Quick mount pilot assembly
- Damper clamp included
- Propane conversion kits are available
- All battery operated

AFVK-SP Series

All Battery Operated Electronic Spark to Pilot Gas Valve Systems



« AFVK-SP-MH-L-SPLIT

Spark to pilot valve kit measures 2-3/4 inch W x 5-3/4 inch D x 5-3/4 inch H

High temperature cable connecting each box

ON/OFF/HIGH/LOW remote control included

Infinite flame adjustment from remote control

Continuous pilot switch on valve box and remote control

Quick mount pilot assembly

Damper clamp included

Propane conversion kits are available

All battery operated



AFVK-SP-SPLIT ⤴

Spark to pilot valve kit measures 2-3/4 inch W x 5-3/4 inch D x 5-3/4 inch H

High temperature cable connecting to each box

Manual flame adjustment

ON/OFF remote control included

Continuous pilot switch on valve box and remote control

Quick mount pilot assembly

Damper clamp included

Propane conversion kits are available

All battery operated



AFVK-SP-H-L-SPLIT ⤴

Spark to pilot valve kit measures 2-3/4 inch W x 5-3/4 inch D x 5-3/4 inch H

High temperature cable connecting each box

ON/OFF/HIGH/LOW remote control included

High or low flame adjustment from remote control

Continuous pilot switch on valve box and remote control

Quick mount pilot assembly

Damper clamp included

Propane conversion kits are available

All battery operated

AFVK-SP-SPLIT Series

All Battery Operated Electronic Spark to Pilot Split Gas Valve Systems



AF-LMF ⤴

30-Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

Exclusive safety seal within the gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available

Easy upgrade to remote operation

AF-LMF-RVS ⤴

Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

HIGH/MED/LOW remote control included

Exclusive safety seal within the gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available

Not recommended for vented gas log sets under 70,000 BTUs

AF-LMF Series Safety Pilot Kit and Remote Systems



« **AF-LMF-RD**

30-Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

Touch screen ON/OFF remote control included

Exclusive safety seal within gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available



AF-LMF-R ⚡

Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

ON/OFF remote control included

Exclusive safety seal within the gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available



AF-LMF-RV ⚡

Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

Variable flame remote control included

Exclusive safety seal within the gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available

Recommended for vented gas log sets under 70,000 BTUs



« **RCAF-LMF-RD**

ON/OFF touch screen remote control for AF-LMF series gas valve kits
Includes solenoid, batteries, wire kit & receiver shield



« **TM-R-AF1**

Wireless wall timer switch for AF-LMF series gas valve kits
Includes batteries, wire kit & receiver shield
Requires AF-1000S solenoid (not included)



« **WS**

Wired wall switch
For use with LSCONVERTER for AF-LMF series gas valve kits



« **RCAF-LMF-WWS**

ON/OFF wireless wall switch for AF-LMF series gas valve kits
Includes solenoid, batteries, wire kit & receiver shield

AF-LMF Series Valve Kit Accessories



RCAF-LMF-V ⤴

Variable flame adjustment remote control for AF-LMF series gas valve kits

Includes variable flame motor drive, batteries, wire kit & receiver shield



RCAF-LMF ⤴

ON/OFF remote control for AF-LMF series gas valve kits

Includes solenoid, batteries, wire kit & receiver shield



LSCONVERTER ⤴

Wired wall switch converter for AF-LMF series gas valve kits

20 foot low voltage switch wire included

Requires AF-1000S solenoid + WS (wall switch)



AF-1000S ⤴

Solenoid for AF-LMF series gas valve kits



1001D-AF1TX ⤴

Wireless wall switch transmitter for use with AFVK-SP series gas valve kits

Includes wireless ON/OFF switch & batteries



1322WT ⤴

Wireless Hi/Low transmitter

For use with all AFVK-SP-H-L & AFVK-SP-MH-L valve kits

Includes Hi/Low wireless transmitter & batteries



TM-R-AF1TX ⤴

Wireless timer for use with AFVK-SP series gas valve kits

Includes 30/60/120/OFF wireless timer & batteries



AF-4000HAT ⤴

Home automation receiver

Connects to home automation systems

For use with AFVK-SP valve kit

Includes home automation receiver, wall plate & batteries



AF-4000ADP24(80) ⤴

110VAC power source for AFVK-SP series gas valve kits



AFVK-SP-PILOT60 ⤴

Natural gas pilot assembly

Kit provides 60 inch wire leads and pilot tubing

For use with all Skytech spark to pilot systems

AFVK-SP Series Valve Kit Accessories



Universal
fan kits...



Dimensions: 12-3/4 inch Length x 4-3/8 inch High x 4-5/16 inch Deep

« **F-180-1**

- Sealed ball bearing construction
- Quiet operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Dual fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty



FK-180-ESC ⤴

- Sealed ball bearing construction
- Quiet operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Dual fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty
- Includes FK-ESC fan control



FK-180-RT ⤴

- Sealed ball bearing construction
- Quiet operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Dual fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty
- Includes Rheostat control and temperature sensor



Dimensions: 12-3/4 inch Length x 4 inch High x 3-1/2 inch Deep

« **F-165-1**

- Low profile compact design fits most fireplaces
- Sealed ball bearing construction
- Quiet Operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Single cross flow fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty



FK-165-ESC ⤴

- Low profile compact design fits most fireplaces
- Sealed ball bearing construction
- Quiet Operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Single cross flow fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty
- Includes FK-ESC fan control




FK-165-RT ⤴

- Low profile compact design fits most fireplaces
- Sealed ball bearing construction
- Quiet Operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Single cross flow fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty
- Includes Rheostat control temperature sensor



FK-SPCONTROL ⚡

Rheostat variable fan speed control

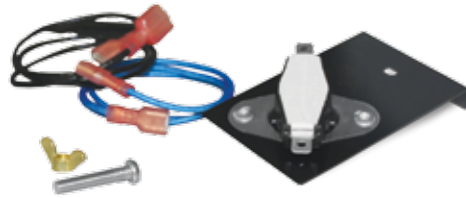

FK-SENSOR ⚡

Temperature sensor



FK-ESC ⚡

Multiple levels of fan speed control
Built in timer to activate fan
200 watt universal fan capacity
two year warranty



FK-RTKIT ⚡

Rheostat variable fan speed control
Temperature sensor with wiring
One year warranty



ACM-24 ⚡

24 inch male cord



ACF-10 ⚡

10 inch female cord

Universal Fan Kit Accessories



Pilot accessories...



UNIVERSAL THERMOCOUPLES ⤴

Universal replacement thermocouples
 30 millivolt output
 Copper coated for corrosion protection
 Includes adapters for most installations
 Available in 24, 30, 36 inch lengths
 Available in the following models:
 02-024 / 02-030 / 02-036




UNIVERSAL THERMOPILES / PILOT GENERATOR ⤴

Universal replacement thermopiles
 750 millivolt output
 For use with any ANSI Z21.20 systems
 Available in 24 and 36 inch lengths
 Available in the following models:
 01-024 / 01-036



STANDING PILOT (THERMOCOUPLE PILOT ASSEMBLY) ⤴

Model#: 2385-9P
 Universal pilot assembly for most vented gas log sets
 Mounting bracket standard
 Includes 30 millivolt thermocouple
 Includes aluminum pilot supply line
 Optional high limit energy cutoff
 Fully assembled ready to install

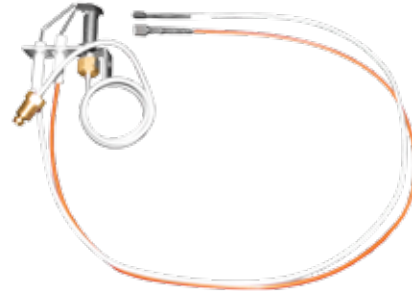


ELECTRONIC IGNITION PILOT ASSEMBLY ⤴

Model#: 238577-13
 Universal pilot assembly for spark to pilot ignition systems
 Mounting bracket standard
 Includes aluminum pilot supply line
 Fully assembled ready to install



Glass & media...

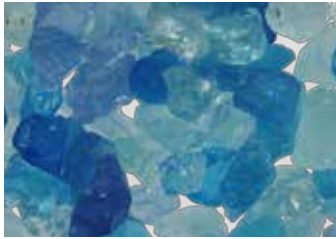


CARIBBEAN
GL- LIGHTBLUE



COLA
GL- COPPER



PEPPER
GL- BLACK



BLUEBERRY
GL- DARKBLUE

Fireglass (GL)

(Large broken approx. 1/2 inch to 3/4 inch in size.)

SOLD IN 5 LB. BAGS



COBALT
GB - COBALT



H2O
GB - CLEAR



MIDNIGHT
GB - BLACK



SKY
GB - LTBLUE



TEQUILA
GB - GOLD



WHITE
GB - WHITE

Liquid Glass (GB)

(Glass beads approx. 16-18 mm in size.)


SOLD IN 5 LB. BAGS




MINT
GL- GREEN



COSMO
GL- RED



CRYSTAL
GL- CRYSTAL




SEABREEZE
GL- SEABREEZE

Fireglass (GL)

(Large broken approx. 1/2 inch to 3/4 inch in size.)


SOLD IN 5 LB. BAGS



COPPER
GR - COPPER



GOLD FINGER
GR - GOLD



COBALT
GR - COBALT



PLATINUM
GR - PLAT



EBONY
GR - BLACK



BRONZE
GR - BRONZE

Reflective Glass (GR)

(Mirror finish broken reflective approx. 3/8 inch to 1/2 inch in size.)

SOLD IN 5 LB. BAGS



FG-LAVA-10

FG-LAVA-50

Lava Rock

Mined from the earth, these dark rocks contrast beautifully against a bright flame. Each rock is approximately 1 inch to 2 inch in diameter. Sold in 10-lb. and 50-lb. bags.



FG-LB30

Lava Boulders

These rugged rocks are 6 inch to 12 inch in diameter, for a coastal, straight-off-the-beach style. Sold in a 30-lb. box.



FG-LS15

FG-LS50

Lava Stones

Made from tumbled lava rock, these stones lend a casual elegance. Each stone is approximately 1-2 inch in diameter. Sold in 50 lb. bags and 15 lb. jugs.



Log sets
for fire pits...



L-SF
SPIT FIRE

This eighteen (18) piece refractory log set is a great alternative to enjoy your fire feature without the mess of real wood and ashes.

- Compatible with pits larger than 19 inches
- Refractory concrete material
- Ships as 1 box, weights approx 52 lb.
- 5 Year limited warranty



L-BF
BEACH FIRE

The modest version of the Spit Fire, this 8 piece set is designed for smaller fire pit burners or used as an accent piece on larger burners.

- Compatible with pits smaller than 20 inches
- Refractory concrete material
- Ships in 1 box, weighs approx 20 lb.
- 5 Year limited warranty



L-SEDONA

The Sedona is the Grand Daddy of all the Firegear log sets. This nineteen (19) piece majestic fire pit log set can stack as high as 32 inch

- Compatible with pits larger than 25 inch
- Refractory concrete material
- Ships in 3 boxes, approx 200 lb, must ship LTL
- 5 Year limited warranty



326-930
TWIG SET

Beach washed and twisted driftwood twigs inspired this design. The coloration in this 6 piece log set is truly unique.

- Compatible with any size fire
- Ceramic fiber composition
- Ships 1 box, weighs approx 22 lb.
- 1 Year limited warranty

Log sets for fire pits



Point of purchase displays...



FG-JEWELRY-KIT

A retail point of purchase display for all of the glass that we have to offer. The POP display holds up to 60 bags of your glass.



GL-GLASS TOWER

Spinning glass tower with 20 glass cylinders. 13 inches tall x 10 inches in diameter.



POPCOUNTER

Remote control counter display

Point-of-Purchase Displays



**LP hoses
& regulators...**



FG-32LPHRK

32 inch Liquid Propane Hose and Regulator Kit, Rated at 85,375 BTU 10 inch WC.
CSA - AGA / CGA Approved, $\frac{3}{8}$ inch Flared ID



FG-12QDK

Quick Disconnect Kit for use with Natural Gas or Liquid Propane - 12 foot (144 inch), $\frac{3}{8}$ inch I.D. Gray PVC Galvanized Steel Hose, Quick Disconnect Fitting and Socket Dust Cap, 80,000 BTU.
CSA-AGA/CGA approved to -40° F



FG-60LPHRK

60 inch Liquid Propane Hose and Regulator Kit, Rated at 73,800 BTU 10 inch WC.
CSA - AGA / CGA Approved, $\frac{3}{8}$ inch Flared ID



FG-LPRK

Rated at 100,000 BTU Liquid Propane Regulator, $\frac{3}{8}$ inch MPT Adapter and Acme Quick Connect.
CSA-AGA/CGA approved

LP hoses & regulators



Key valves,
keys & covers...



KVSC-PC-8

Standard capacity straight key valve with polished chrome cover and 8 inch key
158,000 BTU @ 1/2 PSI



KVHC-PC-8

High capacity straight key valve with polished chrome cover and 8 inch key
354,000 BTU @ 1/2 PSI



BVL-3LK-CP

3/4 inch IPS angle key valve with chrome cover and 8 inch key
400,000 BTU



BVL-3SK-CP

3/4 inch IPS straight key valve with chrome cover and 8 inch key
400,000 BTU



KEY-PTR-3

3 inch pewter key for key valve



KEY-BLK-3

3 inch flat black key for key valve



KEY-PC-8

8 inch polished chrome key for key valve



KEY-PC-3

3 inch polished chrome key for key valve



KEY-PC-12

12 inch polished chrome key for key valve



KEY-PC

Key valve cover - polished chrome



KC-PTR

Key valve cover - Pewter
Fits KVSC valve ONLY!



KC-BLK

Key valve cover - flat black
Fits KVSC valve ONLY!

Key valves, keys & covers



Shut off valves & fittings...



01-387

Connector ball valve 3/8 inch OD flare x 1/2 inch FIP



01-487

Connector ball valve 1/2 inch OD flare x 1/2 inch FIP



01-266

Flare ball valve 3/8 inch OD flare x 3/8 inch OD flare



01-288

Flare ball valve 1/2 inch OD flare x 1/2 inch OD flare



U1-6C-S

Steel gas flare fitting, 3/8 inch OD flare x 3/8 inch MIP

Tapped 1/8 inch FIP



U1-6D-S

Steel gas flare fitting, 3/8 inch OD flare x 1/2 inch MIP

Tapped 3/8 inch FIP



U3-6C-S

Steel gas flare fitting, 3/8 inch OD flare x 3/8 inch FIP



U1-8D-S

Steel gas flare fitting, 1/2 inch OD flare x 1/2 inch MIP

Tapped 3/8 inch FIP



49-66

Steel gas flare fitting, 3/8 inch OD flare x 3/8 inch MIP Elbow



50-68

Steel gas flare fitting, 3/8 inch OD flare x 1/2 inch FIP Elbow



U1-8C-S

Steel gas flare fitting, 1/2 inch OD flare x 3/8 inch MIP

Tapped 1/4 inch FIP



50-88

Steel gas flare fitting, 1/2 inch OD flare x 1/2 inch FIP Elbow



U3-8C-S

Steel gas flare fitting, 1/2 inch OD Flare x 3/8 inch FIP



U3-8D-S

Steel gas flare fitting, 1/2 inch OD flare x 1/2 inch FIP



49-88

Steel gas flare fitting, 1/2 inch OD flare x 1/2 inch MIP Elbow



46-88

Brass female connector 1/2 inch OD x 1/2 inch FIP



46-66

Brass female connector 3/8 inch OD x 3/8 inch FIP



42-R-86

Brass reducing union 1/2 inch x 3/8 inch



46-86

Brass female connector 1/2 inch OD x 3/8 inch FIP



48-86

Brass female connector 1/2 inch OD x 3/8 inch FIP

Shut off valves and fittings



Flex lines...



U3-6D-S

Steel gas flare fitting
3/8 inch OD flare x 1/2" FIP



113BS-E5

Schedule 40 black steel pipe nipple
5 inch long 3/4 inch MIP



113BS-C

Schedule 40 black steel pipe nipple
Close 3/8 inch MIP



BS309-6

Schedule 40 black steel 90 degree elbow
3/8 inch

CSA approved, stainless steel hearth connectors available in 3/8 inch and 1/2 inch OD with flared fittings stainless steel or black coated stainless. Tranquiline "non-whistling" gas flex lines with and without fittings



MODEL

- T100-9898-10
- T100-9898-16
- T100-9898-22
- T100-9898-28
- T100-9898-34
- T200-9898-10
- T200-9898-16
- T200-9898-22
- T200-9898-28
- T200-9898-34
- T200-9898-46

DESCRIPTION

- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 10 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 16 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 22 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 28 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 34 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 10 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 16 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 22 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 28 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 34 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 46 inch, with 1/2 inch OD flare nuts



MODEL

- T102-9898-10
- T102-9898-16
- T102-9898-22
- T102-9898-28
- T102-9898-34
- T202-9898-10
- T202-9898-16
- T202-9898-22
- T202-9898-28
- T202-9898-34

DESCRIPTION

- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 10 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 16 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 22 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 28 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 34 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 10 inch, with 1/2 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 16 inch, with 1/2 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 22 inch, with 1/2 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 28 inch, with 1/2 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 34 inch, with 1/2 inch OD flare nuts, black coated



UNIVERSAL FLEX KITS

Available in models:
UGIK18 / UGIK24 / UGIK36 / UGIK48

Flex lines

Skytech Products Group-Retail, including Skytech Systems and Firegear Outdoors (“SPG- Retail”), a Division of Skytech Products Group, has developed a Minimum Advertised Pricing (MAP) policy (the “Policy”) for all products sold by and purchased from SPG-Retail by and through traditional and/or online retailers (“Products”). In an effort to protect the image and value of SPG-Retail products and to maintain fair and equitable promotional and sales activity among its distributors, dealers, retailers and other resellers (each, a “Retailer”), SPG-Retail has developed the MAP Policy effective immediately. The MAP Policy and its terms and conditions are as follows:

POLICY

Subject to certain exceptions set forth below, no Retailer shall, at any time, advertise or promote any SPG-Retail Products for sale or resale at a price lower than the MAP pricing established by SPG-Retail for such Products.

APPLICATION

The MAP Policy shall apply to all promotions and/or advertisements of any Products purchased from SPG-Retail that appear in any media form, including, without limitation, written or electronic flyers, posters, coupons, mailers, inserts, newspapers, magazines, catalogs, mail order catalogs, Internet, online, or similar electronic media, websites, email newsletters, email solicitations, television, radio, and/or public signage. The MAP Policy shall not apply to (a) any in-store advertising displayed by a Retailer, in-store displays, point-of-sale signs, hang tags or bar codes, or similar product price packaging which merely state the price of such product; (b) the promotion or advertisement of discontinued Product, so long as such Product is clearly marked as discontinued within said advertisement or promotion; and (c) the actual price at which any Products are sold to an individual consumer at or from a Retailer’s physical location or via telephone.

OTHER TERMS AND CONDITIONS

MAP pricing is subject to change from time to time at the sole discretion of SPG-Retail and can be accessed by contacting SPG-Retail Divisions at (888) 672-8929, or by written request via email at info@skytechpg.com. It shall be the responsibility of all Retailers to remain current as to MAP Policy, pricing, and any changes thereto.

The MAP Policy shall apply to all Products sold to SPG-Retail distributors and resold thereby to any Internet or online dealers and retailers, and such distributors shall take all necessary steps to enforce the MAP Policy in connection with each and every such resale.

By accepting Products from SPG-Retail and in consideration of continued access to Products and the benefits realized as an SPG-Retail preferred, approved Retailer, each Retailer accepts and all Products they purchase from SPG-Retail shall be and remain subject to the MAP Policy as set forth herein. Should it be determined that any Product subject to the MAP Policy is or has been advertised or promoted at a price below the MAP pricing established for said Product by SPG- Retail at any time, the violating Retailer shall immediately take all steps necessary to cure said violation and bring its advertising, promotion, pricing and sales activity into compliance with the MAP Policy. SPG-Retail hereby, at any time, reserves the right to discontinue the shipment of Products to the violating Retailer and/or its distributor, and the right to terminate future sales of Products to said violating Retailer and/or its distributor, subject to the parties’ respective financial and confidential obligations that shall survive such termination.

MAP Policy

Skytech Remote Control Warranty Replacement Policy

We understand that with our 5-year limited warranty products can sometimes fail whether they are new or still under warranty. However in order for us to provide the best possible service to you our policy is as follows:

If you feel you have a defective Skytech Remote Control and it is under warranty, that part must be returned to us for evaluation before a replacement will be sent. We will request you to send the product to us for evaluation providing us with your name, address, telephone number and short description of what is wrong with your remote. At the same time, if the remote is under warranty we request a copy or original receipt of date of purchase to ensure we can cover it under the warranty. In some cases we may assign you a Returned Materials Allocation (RMA) number. Once the evaluation has been conducted, if we find the remote control defective or it can be reworked we will send you a new replacement or your fully functioning original remote back to you at no charge.

If you cannot wait for the replacement part to be evaluated due to time constraints or certain situations you have the option to purchase a new remote. If you wish to have that replacement part expedited you will be charged for the shipping costs incurred.

Our Skytech Technical Support telephone line is 855.498.8324. If you have questions or concerns about the operation of your remote control please feel free to call us anytime between 8:00AM – 5:00PM EST.

Warranty Policy



SKYTECH

PRODUCTS GROUP

9230 CONSERVATION WAY
FT. WAYNE, IN 46809

MAIN: 260.459.1703
FAX: 260.459.1592

TECHNICAL SUPPORT: 855.498.8324
SALES SUPPORT: 888.672.8929

skytechpg.com